

ALUMINUM ELECTROLYTIC CAPACITORS

SN Non-polar Series


■ Features: 105°C 1000 hours

■ Recommended Application: Non-polar miniature type for used in reversing polarity DC voltage circuits

■ Corresponding product to RoHS

SN


↑ High Temperat
RN



Specifications

Item	Characteristics												
Operating Temperature Range	-40 ~ +105℃						-25~+105℃						
Rated Voltage Range	6.3 ~ 100VDC						160~250VDC						
Rated Capacitance Range	1 ~ 2200 μ F						1~100μ F						
Capacitance Tolerance	± 20 % at 120Hz , 20℃												
Leakage Current (MAX) (20℃)	I=0.03CV+ 3μA (After rated voltage applied for 2 minutes)												
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV	6.3	10	16	25	35	50	63	80	100	160	200	250
	tan δ	0.24	0.20	0.17	0.15	0.14	0.12	0.10	0.10	0.10	0.20	0.20	0.20
	When nominal capacitance is over 1000uF , tan δ shall be added 0.02 to the listed value with increase of every 1000uF .												
Low Temperature Stability Impedance Ratio (MAX)	WV Z(120Hz)		6.3	10	16	25	35	50	63	80	100	160-250	
			4	3	2	2	2	2	2	2	2	6	
			Z-40℃ / Z+20℃	10	8	6	4	3	3	3	3	3	-
Endurance	After applying rated voltage for 1000 hours at 105℃ , (The polarity shall be reversed every 250 hrs.)												
	Capacitance Chang		Within ± 25 % of initial value										
	Dissipation Factor		Not more than 200% of specified value										
	Leakage Current		Not more than the specified value										
Shelf Life	After placed at 105℃ without voltage applied for 500 hours, the capacitors shall meet the same requirement as Endurance.												

Diagram of Dimensions

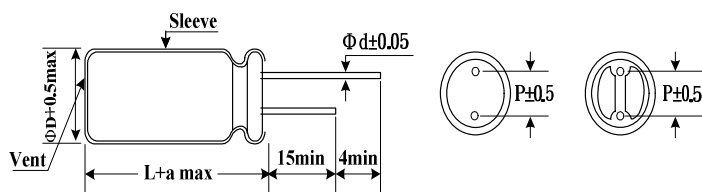

φ D	4.0	5.0	6.3	8.0	10.0	13.0	16.0	18.0
P	1.5	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φ d	0.45	0.5	0.5	0.6	0.6	0.6	0.8	0.8
a	1.0	1.5	1.5	1.5	1.5	2.0	2.0	2.0

Multiplier for Ripple Current

Frequency coefficient

Frequency (Hz)	60	120	300	1K	10K
Factor	0.75	1.00	1.20	1.32	1.65

ALUMINUM ELECTROLYTIC CAPACITORS

SN Non-polar
Series

■ Dimensions, Rated Ripple Current

Capacitance (μF)	Rated (Surge) Voltage																	
	6.3(8)		10(13)		16(20)		25(32)		35(44)		50(63)		63(79)		80(100)		100(125)	
	SIZE	R.C	SIZE	R.C	SIZE	R.C	SIZE	R.C	SIZE	R.C	SIZE	R.C	SIZE	R.C	SIZE	R.C	SIZE	R.C
1											5x11	17	5x11	17	5x11	17	5x11	21
2.2											5x11	25	5x11	25	5x11	29	6.3x11	34
3.3											6.3x11	31	6.3x11	37	6.3x11	39	8x11	49
4.7									5x11	34	5x11	34	5x11	37	8x11	47	8x11	58
											6.3x11	41	6.3x11	44				
10					6.3x11	45	5x11	42	6.3x11	54	6.3x11	56	8x11	74	10x12.5	88	8x11	80
							6.3x11	50			8x11	70					10x12.5	100
22			5x11	57	5x11	59	6.3x11	69	8x11	94	6.3x11	75	8x11	95	10x20	150	13x20	180
					6.3x11	69	8x11	86			8x11	97	10x16	130				
											10x12.5	115						
33	5x11	63	6.3x11	77	8x11	98	8x11	105	10x12.5	125	8x11	110	8x11	115	13x20	205	13x20	220
											10x16	150	10x20	175				
47	6.3x11	84	6.3x11	93	8x11	115	10x12.5	140	10x16	165	8x11	130	13x20	230	13x20	245	13x25	285
											10x20	190						
100	8x11	140	8x11	193	8x11	140	10x20	240	13x20	285	13x20	310	16x25	410	16x25	435	16x32	510
					10x12.5	175												
					10x16	205												
220	10x12.5	235	10x16	255	10x20	330	13x20	390	16x25	520	16x25	570	16x32	660				
330	10x16	310	10x20	380	13x20	445	16x25	580	16x25	630	16x36	790						
470	10x20	400	13x20	470	13x25	570	16x25	690	16x32	820								
1000	13x25	690	16x25	885	16x32	1020												
2200	16x32	1250	16x36	1450														

☆ Size: D φ x L (mm) ☆ Ripple Current: (mA/rms). 105℃, 120Hz

Capacitance (μF)	Rated (Surge) Voltage					
	160(200)		200(250)		250(300)	
	SIZE	R.C	SIZE	R.C	SIZE	R.C
1	6.3x11	21	6.3x11	21	8x11	25
2.2	8x11	34	8x11	34	10x12.5	38
3.3	10x12.5	49	10x12.5	49	10x12.5	49
4.7	10x12.5	58	10x15	62	10x17	66
10	10x17	80	13x20	100	13x20	100
22	13x25	180	13x25	180	16x26	200
33	16x26	220	16x26	220	16x32	250
47	16x26	285	16x32	315	16x36	330
100	18x36	510				